



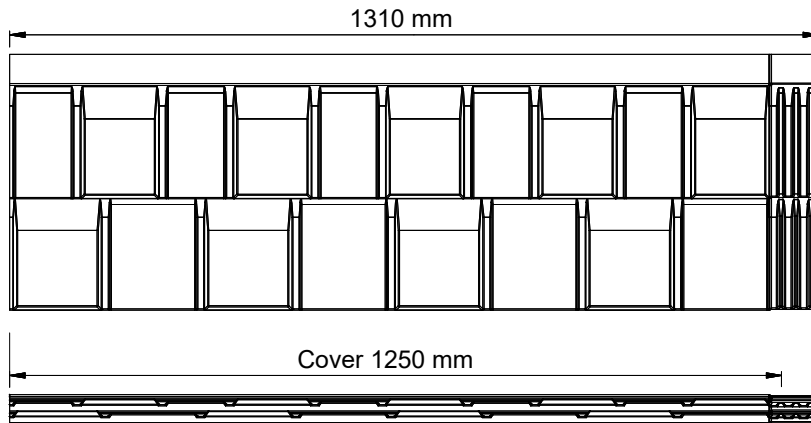


Tile Dimensions



FASTENERS. Typically 5 per Panel.
The quantity and type of fastener is
dependent on local requirements.

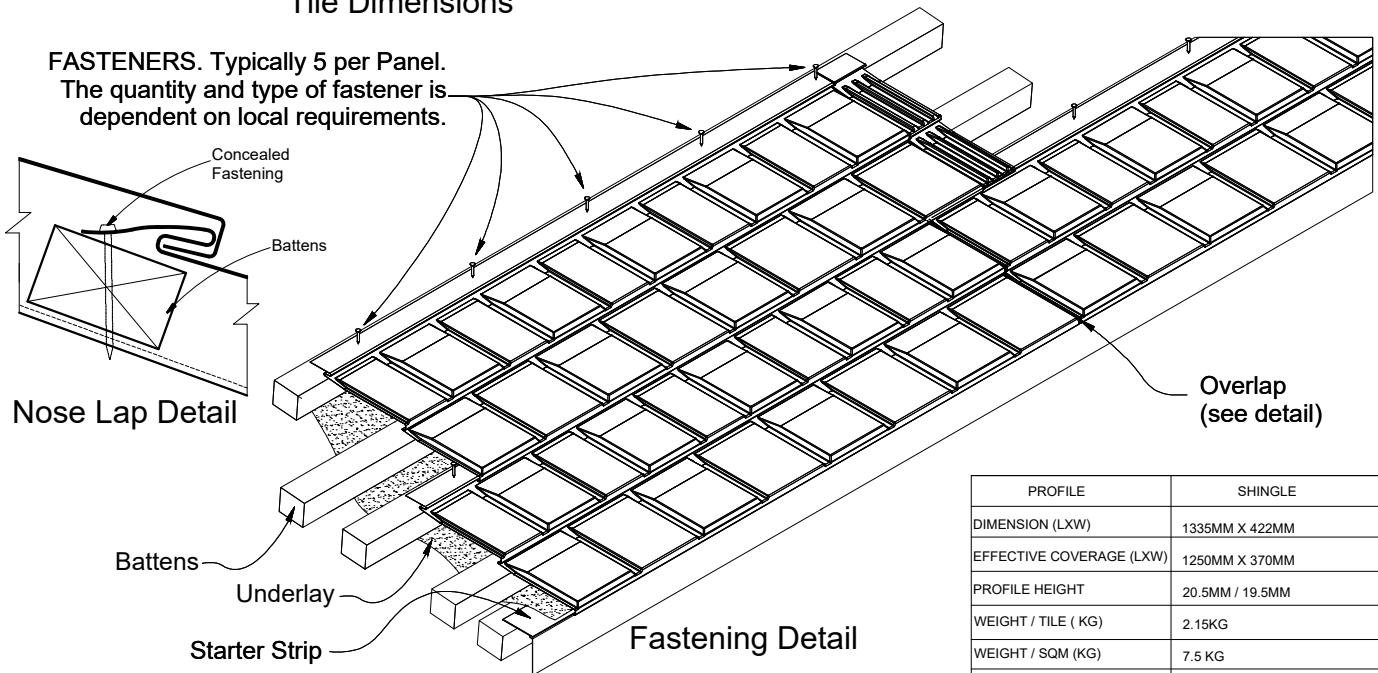

PROFILE	SHINGLE
DIMENSION (LXW)	1335MM X 422MM
EFFECTIVE COVERAGE (LXW)	1250MM X 370MM
PROFILE HEIGHT	20.5MM / 19.5MM
WEIGHT / TILE (KG)	2.15KG
WEIGHT / SQM (KG)	7.5 KG
TILE FASTENER IN WIND ZONES UP TO AND INCLUDING EXTRA HIGH	4 PER TILE, AS PER NZBC ACCEPTABLE SOLUTION E2/AS1
MIN / MAX ROOF PITCH*	15 - 60 DEG
ROOF COVER/ TILE EFFECTIVE COVERAGE AREA	.46 SQM

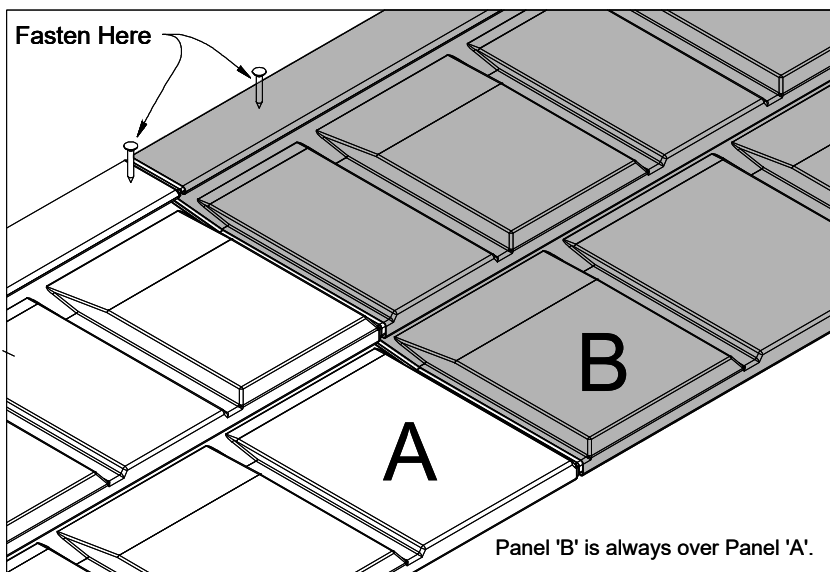

Overlap Detail

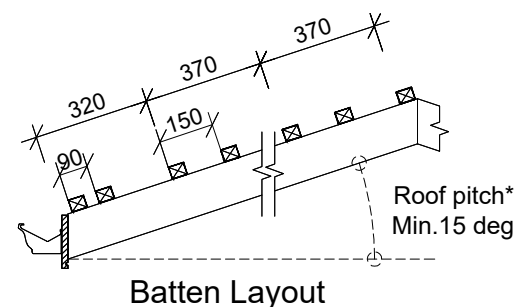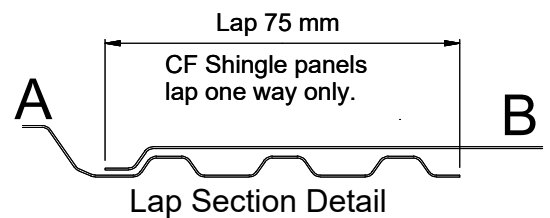

Batten Layout